


KI-PTAX610LM20Z36-i500TSW



- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی
- سه سال ضمانت پایداری کیفیت تصویر

سایر برتری ها

- تصویربرداری ۲ مگاپیکسلی با زوم اپتیکال ۳۶ برابر و دید در شب ۱۵۰ متری جهت رصد دقیق و بزرگنمایی سوژهها در فواصل بسیار دور
- بدنه ضد انفجار از استیل ۳۰۴ (با استانداردهای IP68, IK10 و محافظت ۶ کیلوولتی)
- کیفیت تصویر بالا با WDR سخت افزاری (120dB) و فشرده سازی بهینه H.265
- مجهز به پردازش های هوشمند ویدیویی (VCA)
- تامین انرژی منعطف AC, DC و PoE پرتوان تا ۶۰ ولت
- عملکرد پایدار در بازه دمایی گسترده (۴۰- تا +۸۰ درجه سانتی گراد)

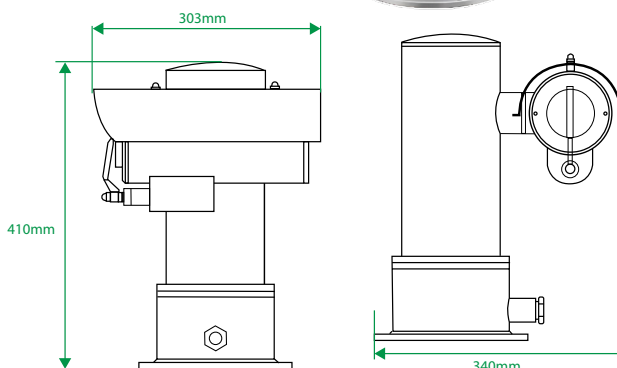

Camera	
Image Sensor	2MP Progressive scan Cmos Sensor (1/2.8")
Lens Mount	N/A
Lens	36X Optical, 6~216mm
Resolution	1920x1080 (2MP)
Angle of View	H-FOV: 112°~28° , V-FOV: 60°~15° , D-FOV: 146°~33°
Available IR Range	150m
D/N Filter	IR Cut Filter Switch (ICR)
Min illumination	Color: 0.0005Lux (AGC on) - B/W: 0.0 Lux(F1.6, AGC ON)
Night Vision	Color /IR
Picture Adjust	
Picture Function	120dB WDR, BLC, HLC, ROI, 2D/3D DNR
Shutter Speed	Manual (1/3 ~ 1/100,000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
Image Parameter	Rotation, Saturation, Brightness, Contrast, Sharpness, AGC, White Balance
Video / Audio	
Video Compression	H.265, H.264, MJPEG
Audio Compression	G.711a/G.711u/G.722.1/G.726/MP2L2/AAC/PCM
Frame Rate(60Hz)	30fps@1920x1080 , 30fps@1280x960, 30fps@1280x720
Transmission Stream	Triple Stream (Code Rate: 128kbps-16Mbps)
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, RTP, RTSP, RTCP, NTP, SMTP, SNMP, IPv6
Compatibility	Onvif Ver2.6 , Profile S, G, T, CGI, SDK, API
Web Viewer	Multi Browser
Function	
Recording	FTP, NVR, CMS
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	Motion Detection
Event Action	N/A
Intelligent Function	Auto tracking, Area intrusion, line crossing, area entry, area leave, face detection, motion detection, video block, people gathering, audio abnormal, scene change

Interface	
Network	1 RJ45 (10M / 100M) Ethernet Port
Audio	1 x Audio Out, 1 x Audio In (Optional)
Alarm	1 x Alarm Out, 2 x Alarm In (Optional)
CVBS	YES (Optional)
Power	PoE LAN / Power IN
Control	1 x RS485 (Optional)
Memory Slot	Yes - Micro SD Slot (256 Gb Max) (Optional)
Camera Housing Box	
Type	Explosion Proof
IP Rating	IP68, IK10, EX Protection, 6KV Surge Protection
Housing	304 Stainless steel
Cooling Water	N/A
Cooling Air	N/A
Sun-Shield	YES / (Optional)
Bracket	YES / Stainless Steel 304 / 2.5 Kg / Wall or poll
EX Flexible Tube	YES / Explosion Proof Cable / 1500 mm
EX Cable Gland	YES / Explosion Proof Cable Gland
General	
Power Supply	AC85V ~ 260V / DC 12V
PoE Supply	IEEE802.3bt-Max 60 Watt
Web Language	English
Dimension	410*303*340 mm
Package Weight	26kg
Operation Humidity	Max Up to 95%RH(Non Condensing)
Operation Temp	-40°C ~ +60°C
Certificate Of Case	
Certificate Mark	Ex d IIC T6 Gb/Ex tD A21 IP68 T80°C
Certificate Number	CNEx16.2708
Guarantee	
Product Guarantee	2 Years Silver Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)