

## KI-S500LM40Z38-i600TSW




YEARS  
SILVER  
GUARANTEE



- دو سال گارانتی نقره ای بدون قید و شرط کی دی تی
- سه سال ضمانت پایداری کیفیت تصویر

### سایر برتری‌ها

- پشتیبانی از ظرفیت SD با ظرفیت 128GB
- بدنه ضد آب و گرد و غبار با درجه IP67
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog و ROI
- تا ۸ ناحیه

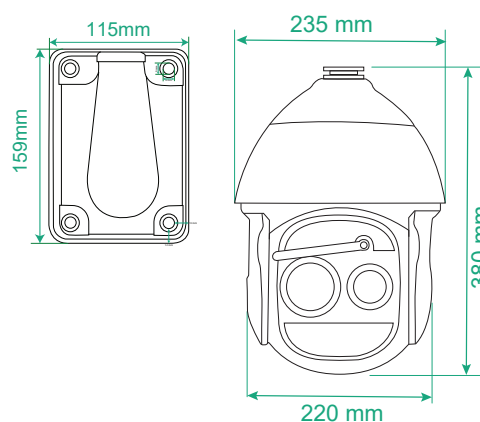

| Camera              |                                                                                                                                                                        |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor        | 4MP Super Starlight (Sony-Japan) Progressive scan Cmos Sensor (1/1.8")                                                                                                 |
| CPU                 | Dual-Core ARM Cortex                                                                                                                                                   |
| Lens                | 38X Optical Lens (6-8~260 mm) (F-Stop F1.5~F4.8)                                                                                                                       |
| Resolution          | 2688*1520 (4MP)                                                                                                                                                        |
| Available IR Range  | 600 m Smart Optical Laser IR Technology                                                                                                                                |
| D/N Filter          | IR Cut Filter Switch (ICR)                                                                                                                                             |
| Min illumination    | Color: 0.0001 Lux(AGC on) - B/W: 0.0 Lux(IR on)                                                                                                                        |
| PTZ                 | Pan Range: 360° Endless - Pan Speed: 0.1~240°/S<br>Tilt Range: -10°~100° - Tilt Speed: 0.1~180°/S<br>Number of Preset: 255 - Patrol: 4 - Pattern: 8 - Park Action: Yes |
| Night Vision        | Super Starlight Technology                                                                                                                                             |
| Picture Adjust      |                                                                                                                                                                        |
| Picture Function    | 120dB WDR, DWDR, BLC, HLC, Ofog, ROI                                                                                                                                   |
| Image Stabilization | Yes(DIS)                                                                                                                                                               |
| Optical Defog       | Yes                                                                                                                                                                    |
| Digital Zoom        | 16X                                                                                                                                                                    |
| Shutter Speed       | Manual (1/3 ~ 1/100,000), Auto                                                                                                                                         |
| Image Control       | Off, On, Timing (Adjust 0 ~ 255)                                                                                                                                       |
| D/N Control         | Timing, Auto, Color on, Color off                                                                                                                                      |
| Image Setting       | Saturation, Brightness, Contrast, Sharpness, Hue                                                                                                                       |
| Video / Audio       |                                                                                                                                                                        |
| Video Compression   | H.264+(Ultra H.264), H.265+ (Ultra H.265)                                                                                                                              |
| Audio Compression   | G.711A, G.711U                                                                                                                                                         |
| Frame Rate(60Hz)    | 30fps@(2688*1520)                                                                                                                                                      |
| Transmission Stream | Triple Stream (Code Rate: 128kbps-16mbps)                                                                                                                              |
| Network             |                                                                                                                                                                        |
| Protocols           | HTTPS, HTTP, TCP/IP V4-V6, ICMP, RTSP, UDP, NTP, DHCP, DDNS, FTP, SNMP-V1-V2-V3, Multi Cast                                                                            |
| Compatibility       | Onvif Ver2.6, Profile S, G, T, CGI, SDK, API                                                                                                                           |
| Streaming Method    | Unicast, Multicast                                                                                                                                                     |
| Web Viewer          | Internet Explorer                                                                                                                                                      |

| Function             |                                            |
|----------------------|--------------------------------------------|
| Recording            | FTP, NVR, CMS,VMS, SD Card                 |
| Record Type          | Manual, Motion Detection, Schedule         |
| Alarm Triggers       | N/A                                        |
| Event Action         | Email, PTZ, Snapshot, Recording, Alarm Out |
| Event                | Motion Detection, Video Shelter            |
| Intelligent Function | N/A                                        |
| Interface            |                                            |
| Network              | 1 RJ45 (10M / 100M) Ethernet Port          |
| Audio                | Audio Out, Audio In                        |
| Alarm                | Alarm Out, Alarm In                        |
| CVBS                 | N/A                                        |
| Power                | PoE LAN, DC/AC In                          |
| Reset Button         | N/A                                        |
| Memory Slot          | Yes - Micro SD/SDHC/SDXC Slot (128 Gb Max) |
| General              |                                            |
| Protection Rating    | IP67, IK10, 6KV Surge Protection           |
| Cover Lens           | Nano Glass                                 |
| Wiper                | Yes                                        |
| Power Supply         | AC24 V ± 25% (4A Max)                      |
| PoE Supply           | IEEE802.3at-Max 30 Watt                    |
| Web Language         | English, Persian                           |
| Dimension            | 380*235 mm                                 |
| Weight               | 8 kg                                       |
| Case Size            | 8"                                         |
| Operation Humidity   | Max Up to 95%RH(Non Condensing)            |
| Operation Temp       | -40°C ~ +70°C                              |
| Guarantee            |                                            |
| Product Guarantee    | 2 Years Silver Guarantee                   |
| MTBF                 | 100K hrs min. MIL-HDBK-217F (25°)          |